

PHOTO BIO[®]



**MULTIBAR
MXR 240W**

SALES@INNOVATIVEGROWERSEQUIPMENT.COM | (815) 991-5010 |   
INNOVATIVEGROWERSEQUIPMENT.COM

PRODUCT SPECIFICATIONS

PHOTOBIO® Multibar MXR 240W

Spectrum	Radiance UV+DR Enhanced Broadband Spectrum
Growth Stage	Full Spectrum - All Growth Stages
Nominal Input Power	250W - Uniform Fill Fixture for 10' Racks
LED Channels	2
Optics	Glass Lensing - Sealed
PAR Efficiency*	≥ 2.5 $\mu\text{mol}/\text{j}$
Typical Photon Flux (PPF)	625 $\mu\text{mol}/\text{s}$
Operating Frequency	50/60Hz
Operating Temp	14-113°F (-10 - 45°C)
Power Factor	≥ 90%
Tolerance	≤ 10%
Dimensions	28" x 44" x 2"
Weight	18 lbs. (8.16 kg)
Beam Angle	120 Degrees
Input Voltage	110 - 277VAC or 348 - 480VAC - Driver Pre-Installed
Certifications	cETLus/DLC/FCC
IP Rating**	IP66
Assembly	Fully Assembled/Ready to Grow - Crated Freight Required
Dimming & Control	0-10V - PWM - RJ12 Port Pre-Installed
Warranty	5 Year Limited

*Efficiency tested at fixture level


** Self Verified

PHOTOBIO'S Multibar MXR 240 Watt LED Grow Light Fill fixture was engineered with exact light uniformity in mind. Designed to fit between two UV6C fixtures, the UV2C fill fixture gives top growers 12 evenly spaced channels 10" apart down a common 10' vertical rack section. PHOTOBIO'S full spectrum LED Grow lights are American Born and US Manufactured with the quality, craft and precision you've come to expect out of PHOTOBIO products.

Light on up today!

PHOTOBIO'S next generation broadband spectrum, rich in deep red and blues, ensures precise chlorophyll A&B absorption rates. Couple this with the most advanced UVA treatment technology built right into the fixture so top cannabis growers can rest assured they will get the best in pathogen mitigation and unsurpassed finishing quality.

 **PRECISE LIGHT UNIFORMITY FOR USE IN SINGLE OR MULTI-TIER CULTIVATION SITES.**

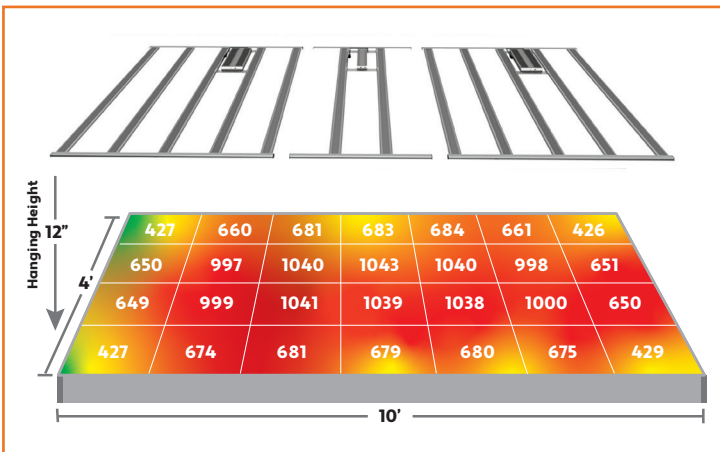

 **NORMALIZED PHOTON SPECTRUM**

